

RADIO TEST REPORT
For
Shenzhen Eview GPS Technology
Personal Mobile Alarm System
Test Model: EV-07B-4G
List Model No.: N/A

Prepared for	:	Shenzhen Eview GPS Technology
Address	:	#1203 Building 2, GuoLe Technology Park, Lirong Road, Dalang, Longhua, Shenzhen, China
Prepared by	:	Shenzhen LCS Compliance Testing Laboratory Ltd.
Address	:	101, 601, Xingyuan Industrial Park, Gushu Community, Xixiang Street, Bao' an District, Shenzhen, Guangdong, China
Tel	:	(+86)755-82591330
Fax	:	(+86)755-82591332
Web	:	www.LCS-cert.com
Mail	:	webmaster@LCS-cert.com
Date of receipt of test sample	:	April 16, 2019
Number of tested samples	:	1
Serial number	:	Prototype
Date of Test	:	April 16, 2019~May 17, 2019
Date of Report	:	May 20, 2019



RADIO TEST REPORT **ETSI EN 300 328 V2.1.1 (2016-11)**

Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using wide band modulation techniques; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU

Report Reference No. : LCS190415004AEC

Date of Issue : May 20, 2019

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 101, 601, Xingyuan Industrial Park, Gushu Community, Xixiang Street, Bao' an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards ☒
 Partial application of Harmonised standards ☐
 Other standard testing method ☐

Applicant's Name..... : Shenzhen Evview GPS Technology

Address : #1203 Building 2, GuoLe Technology Park, Lirong Road, Dalang, Longhua, Shenzhen, China

Test Specification

Standard : ETSI EN 300 328 V2.1.1 (2016-11)

Test Report Form No. : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2017-06

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : Personal Mobile Alarm System

Trade Mark..... : N/A

Test Model : EV-07B-4G

Ratings : DC 3.7V by Rechargeable Li-ion Battery (800mAh)
 Recharged by DC 5V 1000mA Adapter

Result : Positive

Compiled by:

Aking Jin

Aking Jin/ File administrator

Supervised by:

Leo Lee

Leo Lee/ Technique principal

Approved by:

Gavin Liang

Gavin Liang/ Manager

RADIO -- TEST REPORT**Test Report No. : LCS190415004AEC**May 20, 2019
Date of issue

Test Model..... : EV-07B-4G

EUT..... : Personal Mobile Alarm System

Applicant..... : Shenzhen Evview GPS TechnologyAddress..... : #1203 Building 2, GuoLe Technology Park, Lirong Road,
Dalang, Longhua, Shenzhen, China

Telephone..... : /

Fax..... : /

Manufacturer..... : Shenzhen Evview GPS TechnologyAddress..... : #1203 Building 2, GuoLe Technology Park, Lirong Road,
Dalang, Longhua, Shenzhen, China

Telephone..... : /

Fax..... : /

Factory..... : Shenzhen Evview GPS TechnologyAddress..... : #1203 Building 2, GuoLe Technology Park, Lirong Road,
Dalang, Longhua, Shenzhen, China

Telephone..... : /

Fax..... : /

Test Result:**Positive**

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	May 20, 2019	Initial Issue	Gavin Liang

TABLE OF CONTENTS

Test Report Description	Page
1. GENERAL INFORMATION.....	7
1.1. PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	7
1.2. OBJECTIVE	11
1.3. RELATED SUBMITTAL(S)/GRANT(S)	11
1.4. TEST METHODOLOGY	11
1.5. DESCRIPTION OF TEST FACILITY	11
1.6. SUPPORT EQUIPMENT LIST	11
1.7. EXTERNAL I/O.....	11
1.8. LIST OF MEASURING EQUIPMENT	12
1.9. MEASUREMENT UNCERTAINTY	12
1.9. TEST ENVIRONMENT	13
1.10. DESCRIPTION OF TEST MODES	13
2. SYSTEM TEST CONFIGURATION.....	14
2.1. JUSTIFICATION.....	14
2.2. EUT EXERCISE SOFTWARE	14
2.3. SPECIAL ACCESSORIES	14
2.4. BLOCK DIAGRAM/SCHEMATICS	14
2.5. EQUIPMENT MODIFICATIONS.....	14
2.6. CONFIGURATION OF TEST SETUP.....	14
3. SUMMARY OF TEST RESULT	15
4. RF OUTPUT POWER.....	16
4.1. LIMIT.....	16
4.2. TEST SETUP.....	16
4.3. TEST PROCEDURE.....	17
4.4. TEST RESULT.....	18
4.5. RECEIVER CATEGORY	18
5. POWER SPECTRAL DENSITY	19
5.1. LIMIT.....	19
5.2. TEST SETUP.....	19
5.3. TEST PROCEDURE.....	19
5.4. TEST RESULT.....	20
6. DUTY CYCLE, TX-SEQUENCE, TX-GAP.....	21
6.1. LIMIT.....	21
6.2. TEST SETUP.....	21
6.3. TEST PROCEDURE.....	21
6.4. TEST RESULT.....	21
7. MEDIUM UTILISATION (MU) FACTOR.....	22
7.1. LIMIT.....	22
7.2. TEST SETUP.....	22
7.3. TEST PROCEDURE.....	22
7.4. TEST RESULT.....	22
8. ADAPTIVITY (ADAPTIVE EQUIPMENT USING MODULATIONS OTHER THAN FHSS)	23
8.1. LIMIT.....	23
8.2. TEST SETUP.....	24
8.3. TEST PROCEDURE.....	24
8.4. TEST RESULT.....	24
9. OCCUPIED CHANNEL BANDWIDTH.....	25
9.1. LIMIT.....	25
9.2. TEST SETUP.....	25
9.3. TEST PROCEDURE.....	25
9.4. TEST RESULT.....	26

10. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN	27
10.1. LIMIT	27
10.2. TEST SETUP	27
10.3. TEST PROCEDURE	28
10.4. TEST RESULT	29
11. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	30
11.1. LIMIT	30
11.2. TEST SETUP	30
11.3. TEST PROCEDURE	31
11.4. TEST RESULT	32
12. RECEIVER SPURIOUS EMISSIONS	33
12.1. LIMIT	33
12.2. TEST SETUP	33
12.3. TEST PROCEDURE	34
12.4. TEST RESULT	34
13. RECEIVER BLOCKING	35
13.1. LIMIT	35
13.2. TEST SETUP	36
13.3. TEST PROCEDURE	36
13.4. TEST RESULT	37
14. PHOTOGRAPHS OF TEST SETUP	38

1. GENERAL INFORMATION

1.1. Product Description for Equipment Under Test (EUT)

EUT	:	Personal Mobile Alarm System
Model No.	:	EV-07B-4G
Model Declaration	:	N/A
Test Model	:	EV-07B-4G
Power Supply	:	DC 3.7V by Rechargeable Li-ion Battery (800mAh)
Hardware Version	:	Recharged by DC 5V 1000mA Adapter
Software Version	:	EV07B-LTE1-V2.01
Software Version	:	V1.0.6.25
3G	:	
Support Band	:	<input type="checkbox"/> WCDMA Band II(US-Band) <input checked="" type="checkbox"/> WCDMA Band V(US-Band) <input checked="" type="checkbox"/> WCDMA Band I(EU-Band) <input checked="" type="checkbox"/> WCDMA Band VIII(EU-Band)
Release Version	:	R8
Uplink	:	WCDMA Band I: 1920MHz ~ 1980MHz WCDMA Band VIII: 880MHz~915MHz
Downlink	:	WCDMA Band I: 2110MHz ~ 2170MHz WCDMA Band VIII: 925MHz~960MHz
Type Of Modulation	:	WCDMA: BPSK; HSDPA/HSUPA: BPSK
Antenna Description	:	PIFA Antenna, -1.42dBi (max.) For WCDMA Band I; -2.67dBi (max.) For WCDMA Band VIII
Power Class	:	Level 3
LTE	:	
Support Band	:	<input checked="" type="checkbox"/> E-UTRA Band 3(EU-Band) <input checked="" type="checkbox"/> E-UTRA Band 5(No EU-Band) <input checked="" type="checkbox"/> E-UTRA Band 28(EU-Band)
LTE Release Version	:	R9
FDD Band	:	Uplink: E-UTRA Band 3: 1710MHz ~ 1785MHz E-UTRA Band 28: 703MHz ~ 748MHz Downlink: E-UTRA Band 3: 1805MHz ~ 1880MHz E-UTRA Band 28: 758MHz ~ 803MHz
Type Of Modulation	:	QPSK/16-QAM
Antenna Description	:	PIFA Antenna, -1.57dBi (max.) For LTE Band 3; -3.26dBi (max.) For LTE Band 28
Power Class	:	Class 3
Bluetooth	:	
Frequency Range	:	2.402-2.480GHz
Channel Number	:	40 channels
Channel Spacing	:	2MHz
Modulation Type	:	GFSK
Bluetooth Version	:	V4.0 (Support only BT LE)
Antenna Description	:	PIFA Antenna, -0.87dBi (Max.)
WIFI(2.4G Band)	:	
Frequency Range	:	2412-2472MHz
Channel Spacing	:	5MHz
Channel Number	:	13 Channel for 20MHz bandwidth(2412~2472MHz) (Not applicable 802.11n-HT40)
Modulation Type	:	802.11b: DSSS; 802.11g/n: OFDM
Antenna Description	:	PIFA Antenna, -0.87dBi (Max.)
GPS Receiver	:	
Receive Frequency	:	1575.42MHz
Channel Number	:	1
Antenna Description	:	Ceramic Antenna

Product Information

a) The type of modulation used by the equipment:

☐ FHSS

☒ other forms of modulation

b) In case of FHSS modulation:

• In case of non-Adaptive Frequency Hopping equipment:

The number of Hopping Frequencies:

• In case of Adaptive Frequency Hopping Equipment:

The maximum number of Hopping Frequencies:

The minimum number of Hopping Frequencies:

The Dwell Time:

The Minimum Channel Occupation Time:

c) Adaptive / non-adaptive equipment:

☐ non-adaptive Equipment

☒ adaptive Equipment without the possibility to switch to a non-adaptive mode

☐ adaptive Equipment which can also operate in a non-adaptive mode

d) In case of adaptive equipment:

The Channel Occupancy Time implemented by the equipment:

☐ The equipment has implemented an LBT based DAA mechanism

• In case of equipment using modulation different from FHSS:

☐ The equipment is Frame Based equipment

☐ The equipment is Load Based equipment

☐ The equipment can switch dynamically between Frame Based and Load Based equipment

The CCA time implemented by the equipment: μ s

The value q as referred to in clause 4.3.2.5.2.2.2

☒ The equipment has implemented an non-LBT based DAA mechanism

☐ The equipment can operate in more than one adaptive mode

e) In case of non-adaptive Equipment:

The maximum RF Output Power (e.i.r.p.):dBm

The maximum (corresponding) Duty Cycle: 100%

Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

f) The worst case operational mode for each of the following tests:

• RF Output Power

GFSK

• Power Spectral Density

GFSK

• Duty cycle, Tx-Sequence, Tx-gap

.....

• Dwell time, Minimum Frequency Occupation & Hopping Sequence (only for FHSS equipment)

.....

• Hopping Frequency Separation (only for FHSS equipment)

.....

- Medium Utilisation

- Adaptivity & Receiver Blocking

- Occupied Channel Bandwidth

GFSK

- Transmitter unwanted emissions in the OOB domain

GFSK

- Transmitter unwanted emissions in the spurious domain

GFSK

- Receiver spurious emissions

GFSK

g) The different transmit operating modes (tick all that apply):

☒ Operating mode 1: Single Antenna Equipment

☒ Equipment with only 1 antenna

☐ Equipment with 2 diversity antennas but only 1 antenna active at any moment in time

☐ Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)

☐ Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming

☐ Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)

☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1

☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

☐ Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming

☐ Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)

☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1

☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

h) In case of Smart Antenna Systems:

- The number of Receive chains:

- The number of Transmit chains:

☐ symmetrical power distribution

☐ asymmetrical power distribution

In case of beam forming, the maximum beam forming gain:

NOTE: Beam forming gain does not include the basic gain of a single antenna.

i) Operating Frequency Range(s) of the equipment:

- Operating Frequency Range 1: 2402 MHz to 2480 MHz

- Operating Frequency Range 2: MHz to MHz

NOTE: Add more lines if more Frequency Ranges are supported.

j) Occupied Channel Bandwidth(s):

- Occupied Channel Bandwidth: 1.037MHz

NOTE: Add more lines if more channel bandwidths are supported.

k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):

☒ Stand-alone

- ☐ Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)
- ☐ Plug-in radio device (Equipment intended for a variety of host systems)
- Other

l) The extreme operating conditions that apply to the equipment:

Operating temperature range: -20° C to 45° C

Operating voltage range: 3.3V to 4.1V ☐ AC ☒ DC

Details provided are for the: ☒ stand-alone equipment

☐ combined (or host) equipment

☐ test jig

m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:

• Antenna Type

☒ PIFA Antenna

Antenna Gain: -0.87dBi

If applicable, additional beamforming gain (excluding basic antenna gain): dB

- ☐ Temporary RF connector provided
- ☐ No temporary RF connector provided
- ☐ Dedicated Antennas (equipment with antenna connector)
- ☐ Single power level with corresponding antenna(s)
- ☐ Multiple power settings and corresponding antenna(s)

Number of different Power Levels:

Power Level 1: dBm

Power Level 2: dBm

Power Level 3: dBm

NOTE 1: Add more lines in case the equipment has more power levels.

NOTE 2: These power levels are conducted power levels (at antenna connector).

n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:

Details provided are for the: ☒ stand-alone equipment

☐ combined (or host) equipment

☐ test jig

Supply Voltage ☐ AC mains State AC voltage V

☒ DC State DC voltage: 3.7V

In case of DC, indicate the type of power source

- ☐ Internal Power Supply
- ☐ External Power Supply or AC/DC adapter
- ☒ Battery: 3.7V
- ☐ Other:

o) Describe the test modes available which can facilitate testing:

The EUT can transmit in engineering mode.

p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], proprietary, etc.):

Bluetooth®

1.2. Objective

This Type approval report is prepared on behalf of **Shenzhen Eview GPS Technology** in accordance with ETSI EN 300 328 V2.1.1 (2016-11), Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using wide band modulation techniques; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU.

The objective is to determine compliance with ETSI EN 300 328 V2.1.1 (2016-11).

1.3. Related Submittal(s)/Grant(s)

No Related Submittals.

1.4. Test Methodology

All measurements contained in this report were conducted with ETSI EN 300 328 V2.1.1 (2016-11).

1.5. Description of Test Facility

FCC Registration Number is 254912.

Industry Canada Registration Number is 9642A-1.

EMSD Registration Number is ARCB0108.

UL Registration Number is 100571-492.

TUV SUD Registration Number is SCN1081.

TUV RH Registration Number is UA 50296516-001.

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

1.6. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	-

1.7. External I/O

I/O Port Description	Quantity	Cable
SIM Card Slot	1	N/A

1.8. List Of Measuring Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	X-series USB Peak and Average Power Sensor Agilent	Agilent	U2021XA	MY54080022	2018-10-25	2019-10-24
2	4 CH. Simultaneous Sampling 14 Bits 2MS/s	Agilent	U2531A	MY54080016	2018-10-25	2019-10-24
3	Test Software	Ascentest	AT890-SW	20160630	N/A	N/A
4	RF Control Unit	Ascentest	AT890-RFB	N/A	2018-06-16	2019-06-15
5	MXA Signal Analyzer	Agilent	N9020A	MY49061051	2018-06-16	2019-06-15
6	DC Power Supply	Agilent	E3642A	N/A	2018-11-15	2019-11-14
7	MXG Vector Signal Generator	Agilent	N5182A	MY47071151	2018-06-16	2019-06-15
8	ESG Vector Signal Generator	Agilent	E4438C	MY49072627	2018-06-16	2019-06-15
9	PSG Analog Signal Generator	Agilent	E8257D	MY4520521	2018-06-16	2019-06-15
10	Temperature & Humidity Chamber	GUANGZHOU GOGNWN	GDS-100	70932	2018-10-10	2019-10-09
11	EMI Test Software	AUDIX	E3	/	2018-06-16	2019-06-15
12	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2018-06-16	2019-06-15
13	Positioning Controller	MF	MF-7082	/	2018-06-16	2019-06-15
14	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2018-07-26	2019-07-25
15	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2018-07-26	2019-07-25
16	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2018-07-02	2019-07-01
17	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2018-09-20	2019-09-19
18	Broadband Preamplifier	SCHWARZBECK	BBV 9719	9719-025	2018-09-20	2019-09-19
19	EMI Test Receiver	R&S	ESR 7	101181	2018-06-16	2019-06-15
20	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2018-11-15	2019-11-14
21	AMPLIFIER	QuieTek	QTK	CHM/0809065	2018-11-15	2019-11-14
22	RF Cable-R03m	Jye Bao	RG142	CB021	2018-06-16	2019-06-15
23	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2018-06-16	2019-06-15
24	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2018-06-16	2019-06-15
25	6dB Attenuator	/	100W/6dB	1172040	2018-06-16	2019-06-15
26	3dB Attenuator	/	2N-3dB	/	2018-06-16	2019-06-15

Note: All equipment is calibrated through GUANGZHOU LISAI CALIBRATION AND TEST CO.,LTD.

1.9. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Occupied Channel Bandwidth	5 %
RF output power, conducted	1,5 dB
Power Spectral Density, conducted	3 dB
Unwanted Emissions, conducted	3 dB
All emissions, radiated	6 dB
Temperature	1 °C
Humidity	5 %
DC and low frequency voltages	3 %
Time	5 %
Duty Cycle	5 %

1.9. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	24.8
Humidity (%RH)	25-75	52.9
Barometric pressure (mbar)	860-1060	950-1000

1.10. Description Of Test Modes

LCS has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode1: Transmit by BLE
Mode2: Receive by BLE

Note:

- (1) For portable device, radiated spurious emission was verified over X, Y, Z Axis, and shown the worst case on this report.
- (2) Regard to the frequency band operation for systems using Wide Band modulation: the lowest, middle, highest frequency channel for conducted test, and the lowest, highest frequency channel for radiation spurious test.
- (3) The extreme test condition for voltage and temperature were declared by the manufacturer.

2. SYSTEM TEST CONFIGURATION

2.1. Justification

The system was configured for testing in engineering mode.

2.2. EUT Exercise Software

N/A.

2.3. Special Accessories

N/A.

2.4. Block Diagram/Schematics

Please refer to the related document.

2.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

2.6. Configuration of Test Setup

Please refer to the test setup photo.

3. SUMMARY OF TEST RESULT

☒ No deviations from the test standards

☐ Deviations from the test standards as below description:

Technical requirements for the equipment using wide band modulations other than FHSS:

Performed Test Item	Normative References	Test Performed	Deviation
RF Output Power & Receiver Category	ETSI EN 300 328 V2.1.1 (2016-11)	Yes	No
Power Spectral Density	ETSI EN 300 328 V2.1.1 (2016-11)	Yes	No
Duty cycle, Tx-Sequence, Tx-gap	ETSI EN 300 328 V2.1.1 (2016-11)	N/A	N/A
Medium Utilisation (MU) factor	ETSI EN 300 328 V2.1.1 (2016-11)	N/A	N/A
Adaptivity	ETSI EN 300 328 V2.1.1 (2016-11)	N/A	N/A
Occupied Channel Bandwidth	ETSI EN 300 328 V2.1.1 (2016-11)	Yes	No
Transmitter unwanted emissions in the out-of-band domain	ETSI EN 300 328 V2.1.1 (2016-11)	Yes	No
Transmitter unwanted emissions in the spurious domain	ETSI EN 300 328 V2.1.1 (2016-11)	Yes	No
Receiver Spurious Emissions	ETSI EN 300 328 V2.1.1 (2016-11)	Yes	No
Receiver Blocking	ETSI EN 300 328 V2.1.1 (2016-11)	Yes	No

Note: The EUT can operate in an adaptive mode, and can't operate in a non-adaptive mode which is stated by the supplier.

4. RF OUTPUT POWER

4.1. Limit


For adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20 dBm.

The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.

This limit shall apply for any combination of power level and intended antenna assembly.

4.2. Test Setup

For Conducted Measurement

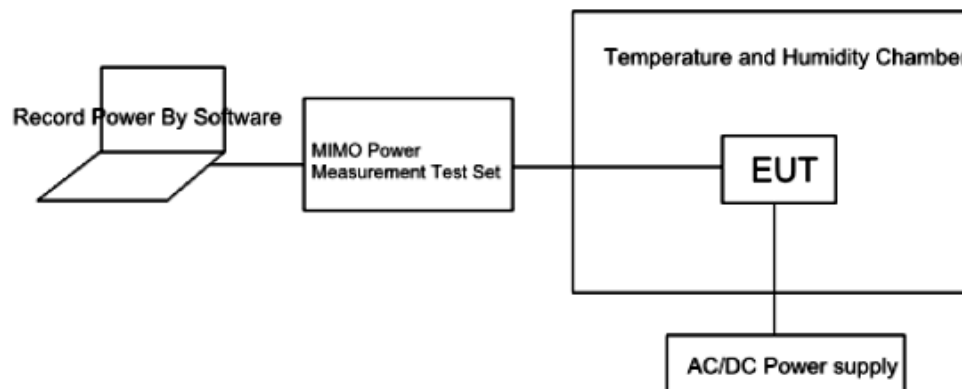

4.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.2

Step 1:

- The fast power sensor use the following setting: Sample speed 1 MS/s.

Step 2:

- Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.

Step 3:

- Find the start and stop times of each burst in the stored measurement samples.

Step 4:

- Between the start and stop times of each individual burst calculate the RMS power over the burst. Save these Pburst values, as well as the start and stop times for each burst.

Step 5:

- The highest of all Pburst values (value "A" in dBm) will be used for maximum e.i.r.p. calculations.

Step 6:

- Add the (stated) antenna assembly gain "G" in dBi of the individual antenna.
- If applicable, add the additional beamforming gain "Y" in dB.

The RF Output Power (P) shall be calculated using the formula below:

$$P = A + G + Y$$

4.4. Test Result

Please refer to the Appendix for Bluetooth (BT LE) RF Test Data.

4.5. Receiver Category

Receiver Category 1: Adaptive equipment with a maximum RF output power greater than 10 dBm e.i.r.p. shall be considered as receiver category 1 equipment.

Receiver Category 2: Non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % or adaptive equipment with a maximum RF output power of 10 dBm e.i.r.p. shall be considered as receiver category 2 equipment.

Receiver Category 3: Non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % or adaptive equipment with a maximum RF output power of 0 dBm e.i.r.p. shall be considered as receiver category 3 equipment.


As this an adaptivity device with a maximum power of greater than 0dBm, it belongs to **receiver category 3**.

5. POWER SPECTRAL DENSITY

5.1. Limit

For equipment using wide band modulations other than FHSS, the maximum Power Spectral Density is limited to 10dBm per MHz.

5.2. Test Setup

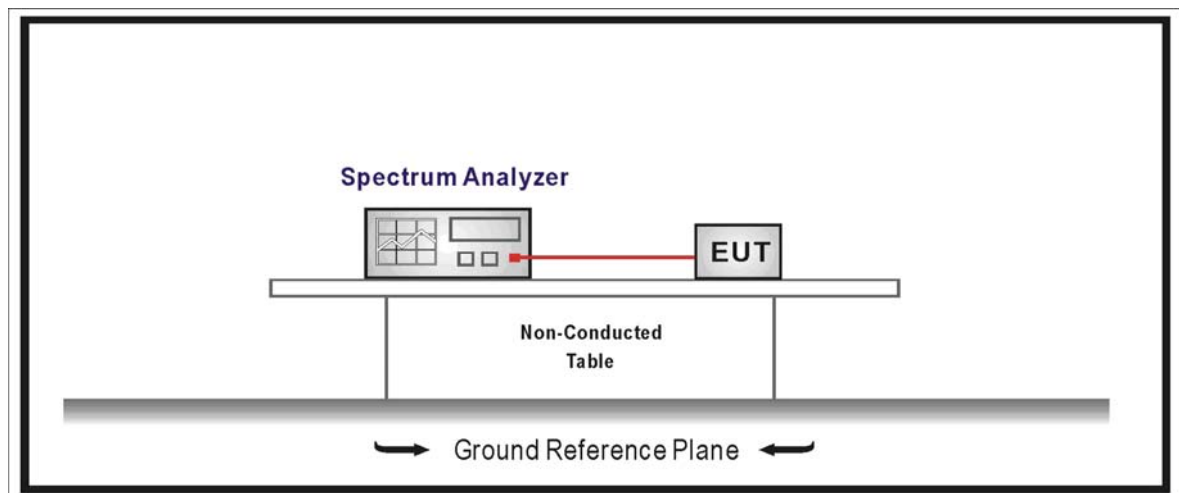

5.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.3

Step 1:

Connect the UUT to the spectrum analyzer and use the following settings:

- Start Frequency: 2 400 MHz
- Stop Frequency: 2 483,5 MHz
- Resolution BW: 10 kHz
- Video BW: 30 kHz
- Sweep Points: > 8 350
- Detector: RMS
- Trace Mode: Max Hold
- Sweep time: Auto

For non-continuous signals, wait for the trace to be completed. Save the (trace) data set to a file.

Step 2:

For each frequency point, add up the amplitude (power) values for the different transmit chains and use this as the new data set.

Step 3:

Add up the values for amplitude (power) for all the samples in the file.

Step 4:

Normalize the individual values for amplitude so that the sum is equal to the RF Output Power (e.i.r.p.).

Step 5:

Starting from the first sample in the file (lowest frequency), add up the power of the following samples representing a 1 MHz segment and record the results for power and position (i.e. sample #1 to #100).

This is the Power Spectral Density (e.i.r.p.) for the first 1 MHz segment which shall be recorded.

Step 6:

Shift the start point of the samples added up in step 5 by 1 sample and repeat the procedure in step 5 (i.e. sample #2 to #101).

Step 7:

Repeat step 6 until the end of the data set and record the radiated Power Spectral Density values for each of the 1 MHz segments. From all the recorded results, the highest value is the maximum Power Spectral Density for the UUT.

5.4. Test Result

Please refer to the Appendix for Bluetooth(BT LE) RF Test Data.


6. DUTY CYCLE, TX-SEQUENCE, TX-GAP

6.1. Limit

The Duty Cycle shall be equal to or less than the maximum value declared by the supplier.

The maximum Tx-sequence Time and the minimum Tx-gap Time shall be according to the formula below: Maximum Tx-Sequence Time = Minimum Tx-gap Time = M
where M is in the range of 3,5 ms to 10 ms.

6.2. Test Setup

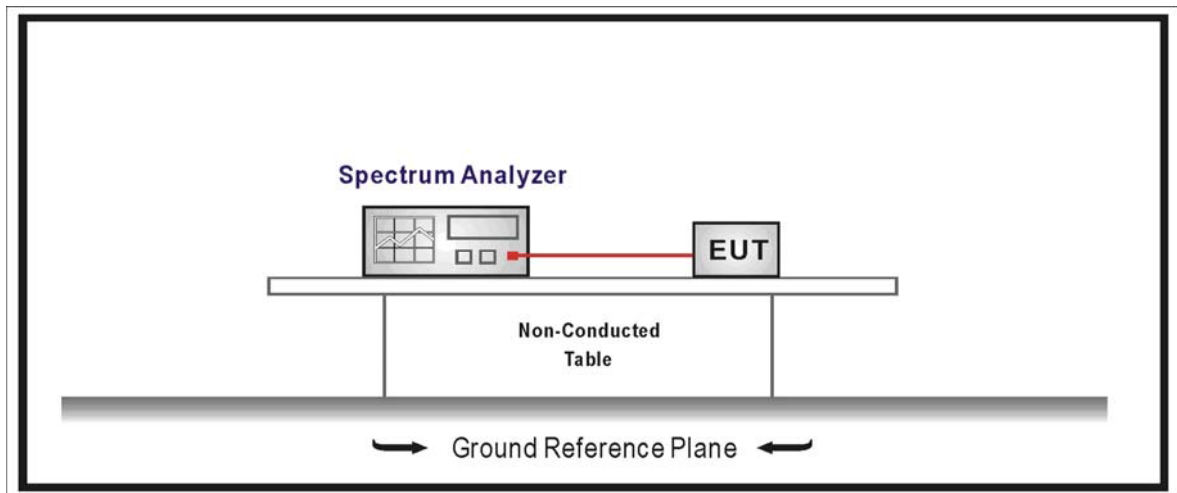

6.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.2

6.4. Test Result

These requirements apply to non-adaptive frequency hopping equipment or to adaptive frequency hopping equipment operating in a non-adaptive mode.

These requirements do not apply for equipment with a maximum declared RF Output power of less than 10dBm E.I.R.P. or for equipment when operating in a mode where the RF Output power is less than 10dBm E.I.R.P.

No applicable.


7. MEDIUM UTILISATION (MU) FACTOR

7.1. Limit

For non-adaptive equipment

The maximum Medium Utilisation factor for non-adaptive Frequency Hopping equipment shall be 10 %.

7.2. Test Setup

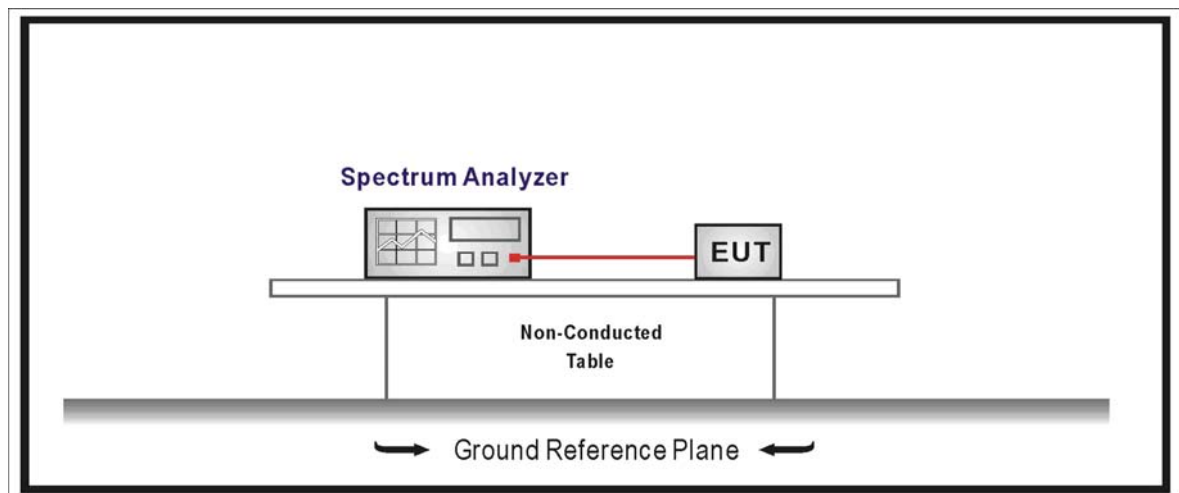

7.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.2

7.4. Test Result

This requirement does not apply to adaptive equipment unless operating in a non-adaptive mode. In addition, this requirement does not apply for equipment with a maximum declared RF Output power level of less than 10dBm E.I.R.P. or for equipment when operating in a mode where the RF Output power is less than 10dBm E.I.R.P.

No applicable.


8. ADAPTIVITY (ADAPTIVE EQUIPMENT USING MODULATIONS OTHER THAN FHSS)

8.1. Limit

Adaptivity Limit
<input type="checkbox"/> Non-LBT based Detect and Avoid --- The channel shall remain unavailable for a minimum time equal to 1 s after which the channel may be considered again as an 'available' channel; --- $COT \leq 40$ ms; --- $COT \leq 60$ ms; --- Idle Period shall be minimum 5% of COT with a minimum of 100us; --- Detection threshold level = $-70\text{dBm/MHz} + 20 - P_{\text{out E.I.R.P}}$ (Pout in dBm);
<input type="checkbox"/> LBT based Detect and Avoid(Frame Based Equipment) --- The CCA observation time shall be not less than 20 us; --- The CCA time used by the equipment shall be declared by the supplier; --- $COT = 1-10$ ms; --- Idle Period = 5% of COT; --- Detection threshold level = $-70\text{dBm/MHz} + 20 - P_{\text{out E.I.R.P}}$ (Pout in dBm);
<input type="checkbox"/> LBT based Detect and Avoid(Load Based Equipment) --- The CCA observation time shall be not less than 20 us; --- The CCA time used by the equipment shall be declared by the supplier; --- $COT \leq (13 / 32) * q$ ms; $q = [4 \sim 32]$; 1.625ms~13ms; --- R = number of clear idle slots are randomly $[1 \sim q]$. Every time an Extended CCA is required and the 'R' value stored in a counter. --- Detection threshold level = $-70\text{dBm/MHz} + 20 - P_{\text{out E.I.R.P}}$ (Pout in dBm);
<input type="checkbox"/> Short Control Signalling Transmissions: --- Short Control Signalling Transmissions shall have a maximum duty cycle of 10% within an observation period of 50ms.

8.2. Test Setup

Conducted measurements

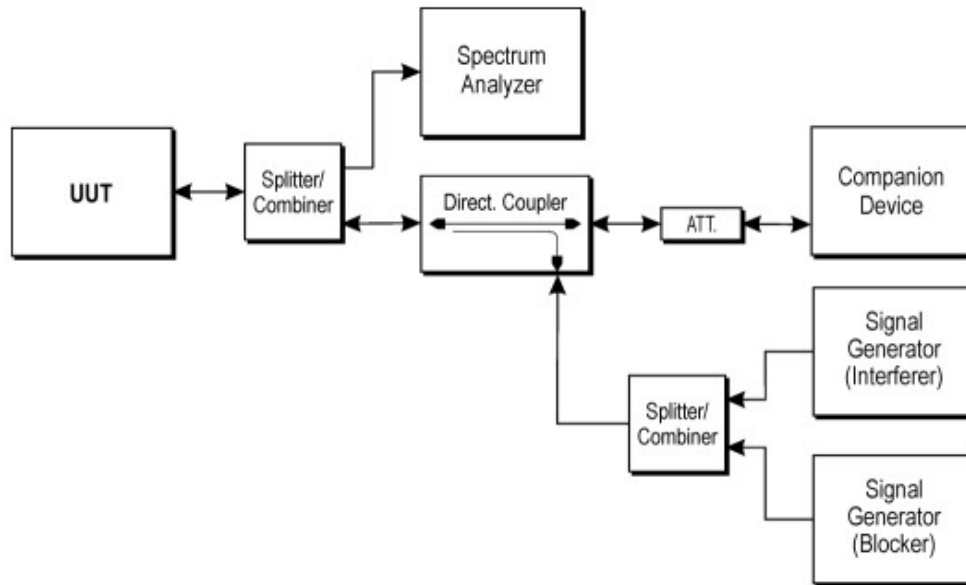

8.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.7

8.4. Test Result

This requirement does not apply to non-adaptive equipment or adaptive equipment operating in a non-adaptive mode providing the equipment complies with the requirements and/or restrictions applicable to non-adaptive equipment.

In addition, this requirement does not apply for equipment with a maximum declared RF Output power level of less than 10dBm E.I.R.P. or for equipment when operating in a mode where the RF Output power is less than 10dBm E.I.R.P.

No applicable.


9. OCCUPIED CHANNEL BANDWIDTH

9.1. Limit

The Occupied Channel Bandwidth for each hopping frequency shall fall completely within the band given in 2.4GHz to 2.4835GHz.

For non-adaptive Frequency Hopping equipment with E.I.R.P greater than 10dBm, the Occupied Channel Bandwidth for every occupied hopping frequency shall be equal to or less than the value declared by the supplier. This declared value shall not be greater than 5 MHz.

9.2. Test Setup

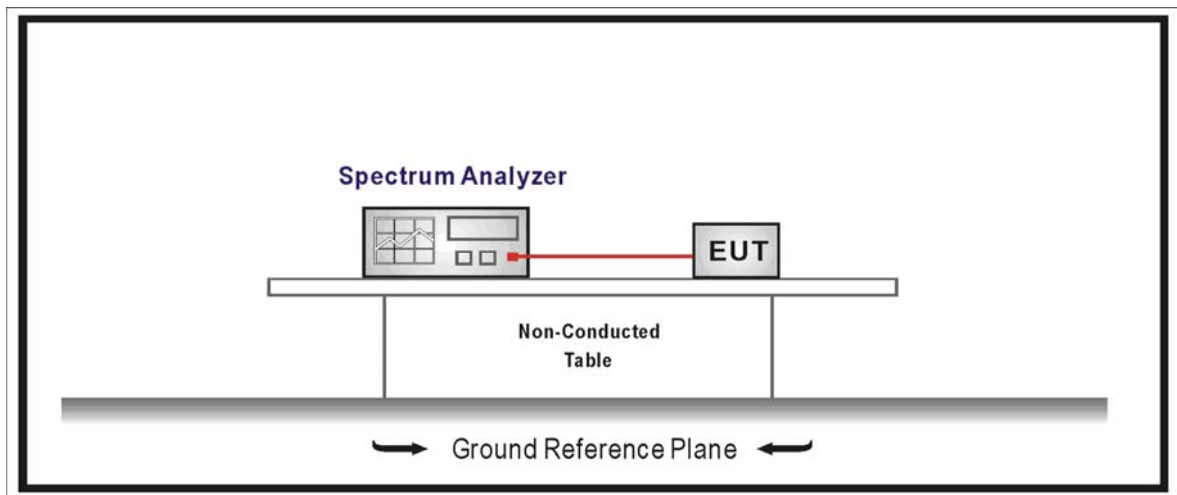

9.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.8

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: The centre frequency of the channel under test
- Resolution BW: $\sim 1\%$ of the span without going below 1% (We set RBW= 40KHz)
- Video BW: $3 \times \text{RBW}$
- Frequency Span: $2 \times \text{Occupied Channel Bandwidth}$ (e.g. 40 MHz for a 20 MHz channel)
- Detector Mode: RMS
- Trace Mode: Max Hold

Step 2:

Wait until the trace is completed. Find the peak value of the trace and place the analyzer marker on this peak.

Step 3:

Use the 99 % bandwidth function of the spectrum analyzer to measure the Occupied Channel Bandwidth of the UUT. This value shall be recorded.

9.4. Test Result

Please refer to the Appendix for Bluetooth(BT LE) RF Test Data.

10. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

10.1. Limit

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 3.


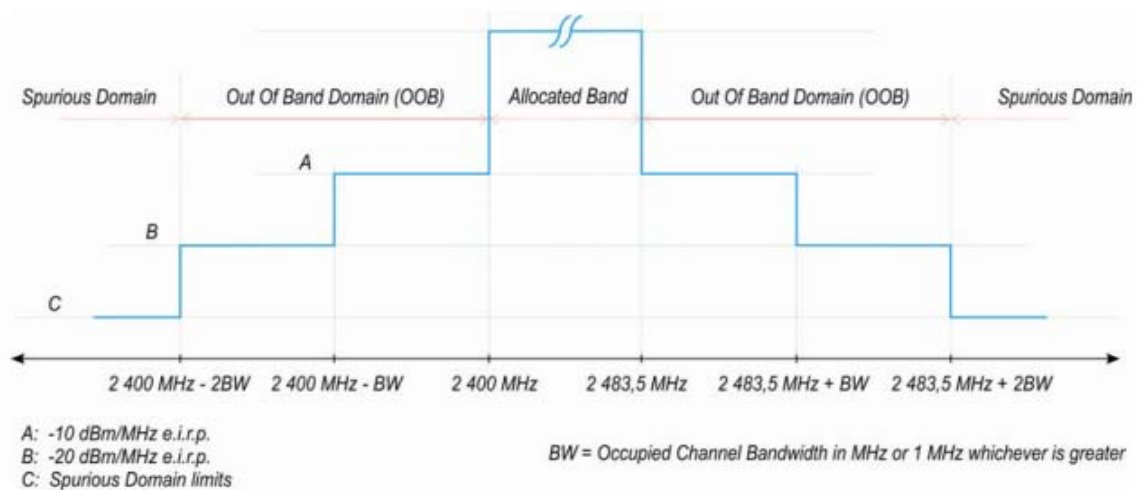


Figure 3: Transmit mask

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

10.2. Test Setup

For Conducted Measurement

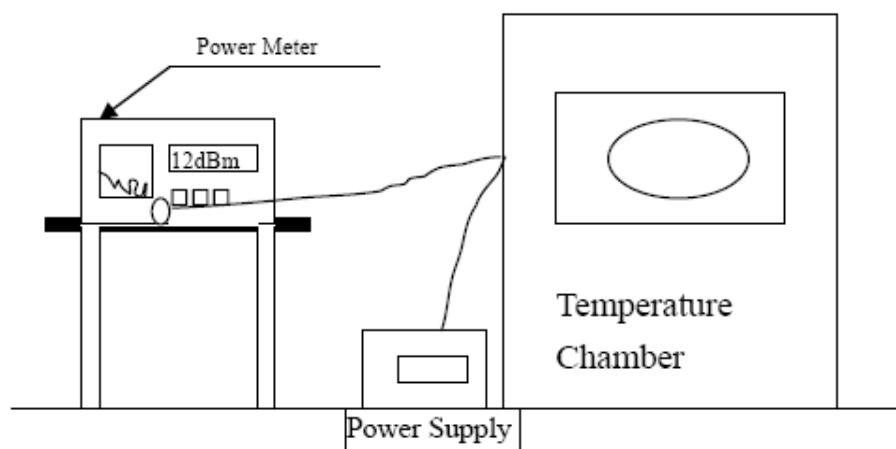

10.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.9

Step 1:

- Connect the UUT to the spectrum analyzer and use the following settings:
- Centre Frequency: 2 484 MHz
- Span: 0 Hz
- Resolution BW: 1 MHz
- Filter mode: Channel filter
- Video BW: 3 MHz
- Detector Mode: RMS
- Trace Mode: Clear / Write
- Sweep Mode: Continuous
- Sweep Points: 5 000
- Trigger Mode: Video trigger

NOTE 1: In case video triggering is not possible, an external trigger source may be used.

- Sweep Time: Suitable to capture one transmission burst

Step 2: (segment 2 483,5 MHz to 2 483,5 MHz + BW)

- Adjust the trigger level to select the transmissions with the highest power level.
- For frequency hopping equipment operating in a normal hopping mode, the different hops will result in signal bursts with different power levels. In this case the burst with the highest power level shall be selected.
- Set a window (start and stop lines) to match with the start and end of the burst and in which the RMS power shall be measured using the Time Domain Power function.
- Select RMS power to be measured within the selected window and note the result which is the RMS power within this 1 MHz segment (2 483,5 MHz to 2 484,5 MHz). Compare this value with the applicable limit provided by the mask.
- Increase the centre frequency in steps of 1 MHz and repeat this measurement for every 1 MHz segment within the range 2 483,5 MHz to 2 483,5 MHz + BW. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 3: (segment 2 483,5 MHz + BW to 2 483,5 MHz + 2BW)

- Change the centre frequency of the analyzer to 2 484 MHz + BW and perform the measurement for the first 1 MHz segment within range 2 483,5 MHz + BW to 2 483,5 MHz + 2BW. Increase the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + 2 BW - 0,5 MHz.

Step 4: (segment 2 400 MHz - BW to 2 400 MHz)

- Change the centre frequency of the analyzer to 2 399,5 MHz and perform the measurement for the first 1 MHz segment within range 2 400 MHz - BW to 2 400 MHz. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0,5 MHz.

Step 5: (segment 2 400 MHz - 2BW to 2 400 MHz - BW)

- Change the centre frequency of the analyzer to 2 399,5 MHz - BW and perform the measurement for the first 1 MHz segment within range 2 400 MHz - 2BW to 2 400 MHz - BW. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0,5 MHz.

Step 6:

- In case of conducted measurements on equipment with a single transmit chain, the declared antenna assembly gain "G" in dBi shall be added to the results for each of the 1 MHz segments and compared with the limits provided by the mask given in figures 1 or 3. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.
- In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), the measurements need to be repeated for each of the active transmit chains. The declared antenna assembly gain "G" in dBi for a single antenna shall be added to these results. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered. Comparison with the applicable limits shall be done using any of the options given below:
 - Option 1: the results for each of the transmit chains for the corresponding 1 MHz segments shall be added. The additional beamforming gain "Y" in dB shall be added as well and the resulting values compared with the limits provided by the mask given in figures 1 or 3.
 - Option 2: the limits provided by the mask given in figures 1 or 3 shall be reduced by $10 \times \log_{10}(\text{Ach})$ and the additional beamforming gain "Y" in dB. The results for each of the transmit chains shall be individually compared with these reduced limits.

NOTE 2: Ach refers to the number of active transmit chains.

It shall be recorded whether the equipment complies with the mask provided in figures 1 or 3.

10.4. Test Result

Please refer to the Appendix for Bluetooth(BT LE) RF Test Data.


11. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

11.1. Limit


Transmitter Limits for Spurious Emissions		
Frequency Range	Maximum power E.R.P. ($\leq 1\text{GHz}$) E.I.R.P. ($> 1\text{GHz}$)	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 862 MHz	-54 dBm	100 kHz
862 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz

11.2. Test Setup

For Radiated Measurement

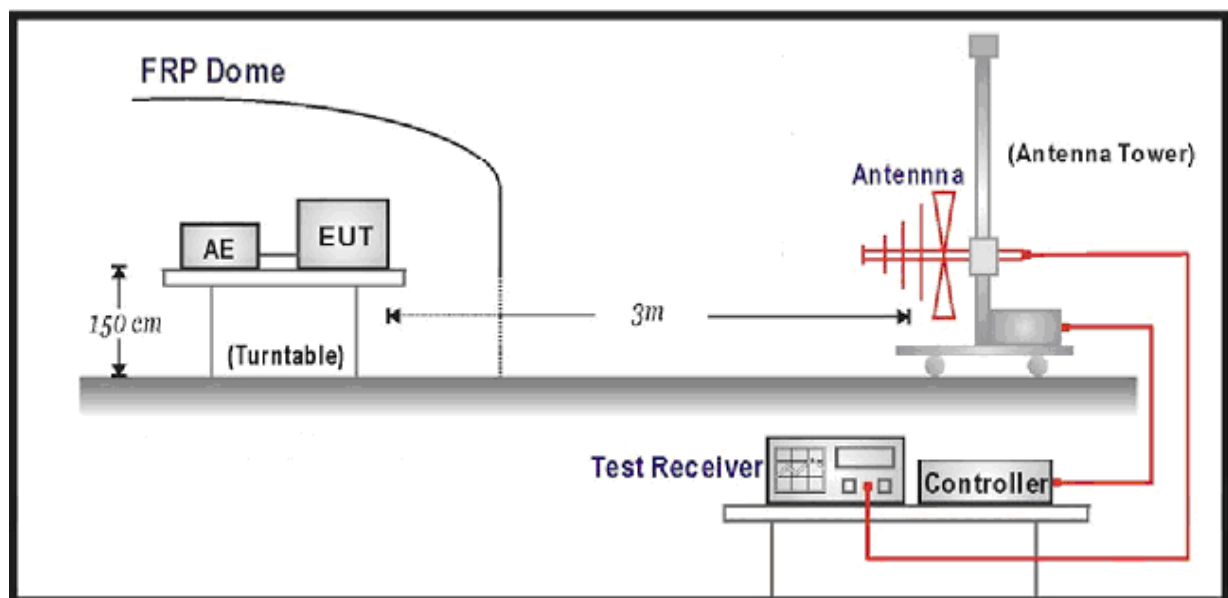

For Conducted Measurement

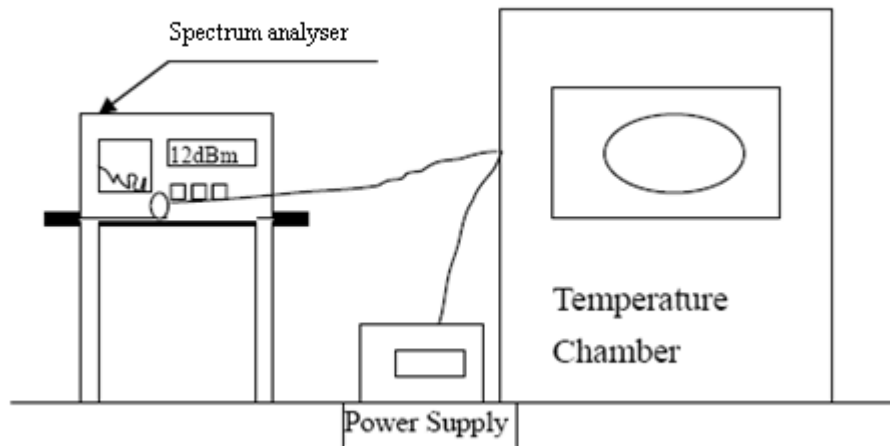

11.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.10

Step 1:

The sensitivity of the spectrum analyser should be such that the noise floor is at least 12 dB below the limits given in tables 1 or 4.

Step 2:

The emissions over the range 30 MHz to 1 000 MHz shall be identified.

Spectrum analyser settings:

- Resolution bandwidth: 100 kHz
- Video bandwidth: 300 kHz
- Detector mode: Peak
- Trace Mode: Max Hold
- Sweep Points: $\geq 9\,970$

NOTE 1: For spectrum analysers not supporting this high number of sweep points, the frequency band may need to be segmented.

• Sweep time: For non continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long, such that for each 100 kHz frequency step, the measurement time is greater than two transmissions of the UUT. For Frequency Hopping equipment operating in a normal operating (hopping not disabled) mode, the sweep time shall be further increased to capture multiple transmissions on the same hopping frequency in different hopping sequences. Allow the trace to stabilize. Any emissions identified during the sweeps above and that fall within the 6 dB range below the applicable limit or above, shall be individually measured using the procedure in clause 5.3.10.2.1.2 and compared to the limits given in tables 1 or 4.

Step 3:

The emissions over the range 1 GHz to 12,75 GHz shall be identified.

Spectrum analyser settings:

- Resolution bandwidth: 1 MHz
- Video bandwidth: 3 MHz
- Detector mode: Peak

- Trace Mode: Max Hold
- Sweep Points: $\geq 11\,750$

NOTE 2: For spectrum analysers not supporting this high number of sweep points, the frequency band may need to be segmented.

- Sweep time: For non continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long, such that for each 1 MHz frequency step, the measurement time is greater than two transmissions of the UUT.

11.4. Test Result

Please refer to the Appendix for Bluetooth(BT LE) RF Test Data.


12. RECEIVER SPURIOUS EMISSIONS

12.1. Limit


Spurious emissions limits for receivers		
Frequency Range	Maximum power E.R.P. ($\leq 1\text{GHz}$) E.I.R.P. ($> 1\text{GHz}$)	Measurement bandwidth
30 MHz to 1 GHz	-57 dBm	100 kHz
1 GHz to 12.75 GHz	-47 dBm	1 MHz

12.2. Test Setup

For Radiated Measurement

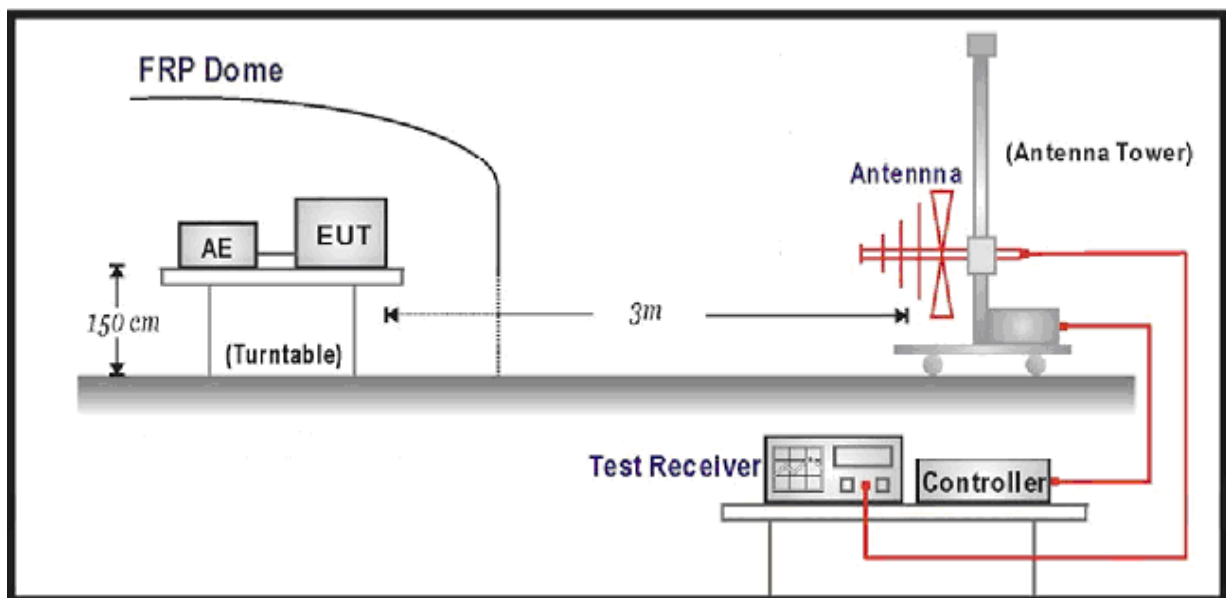

For Conducted Measurement

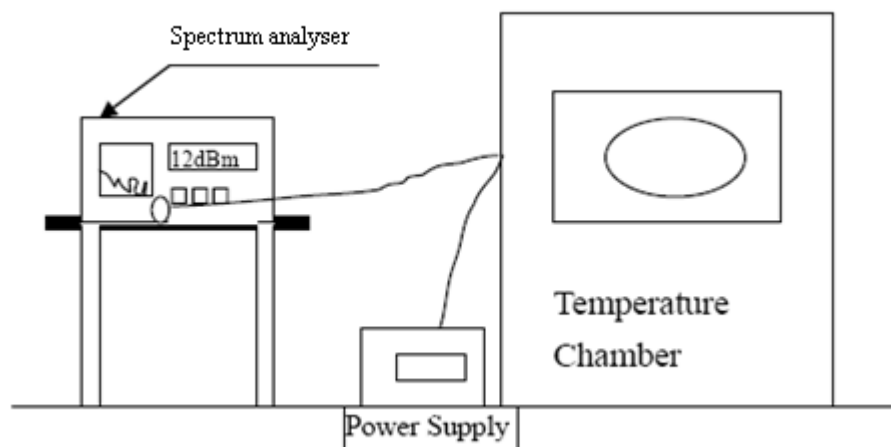

12.3. Test Procedure

Refer to ETSI EN 300 328 V2.1.1 (2016-11) Clause 5.4.11

Step 1:

The sensitivity of the spectrum analyzer should be such that the noise floor is at least 12 dB below the limits given in tables 2 or 5.

Step 2:

The emissions over the range 30 MHz to 1 000 MHz shall be identified.

Spectrum analyzer settings:

- Resolution bandwidth: 100 kHz
- Video bandwidth: 300 kHz
- Detector mode: Peak
- Trace Mode: Max Hold
- Sweep Points: $\geq 9\,970$
- Sweep time: Auto

Allow the trace to stabilize. Any emissions identified during the sweeps above and that fall within the 6 dB range below the applicable limit or above, shall be individually measured using the procedure in clause 5.3.11.2.1.2 and compared to the limits given in tables 2 or 5.

Step 3:

The emissions over the range 1 GHz to 12,75 GHz shall be identified.

Spectrum analyzer settings:

- Resolution bandwidth: 1 MHz
- Video bandwidth: 3 MHz
- Detector mode: Peak
- Trace Mode: Max Hold
- Sweep Points: $\geq 11\,750$
- Sweep time: Auto

Allow the trace to stabilize. Any emissions identified during the sweeps above that fall within the 6 dB range below the applicable limit or above, shall be individually measured using the procedure in clause 5.3.11.2.1.2 and compared to the limits given in tables 2 or 5. Frequency Hopping equipment may generate a block (or several blocks) of spurious emissions anywhere within the spurious domain. If this is the case, only the highest peak of each block of emissions shall be measured using the procedure in clause 5.3.11.2.1.2.

Step 4:

- In case of conducted measurements on smart antenna systems (equipment with multiple receive chains), the steps 2 and 3 need to be repeated for each of the active receive chains (Ach). The limits used to identify emissions during this pre-scan need to be reduced with $10 \times \log_{10}(\text{Ach})$ (number of active receive chains).

12.4. Test Result

Please refer to the Appendix for Bluetooth(BT LE) RF Test Data.

13. RECEIVER BLOCKING

13.1. Limit

Adaptive Frequency Hopping equipment shall comply with the requirements defined in clause 4.3.1.12.4

Table 6: Receiver Blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 2)	Type of blocking signal
$P_{\min} + 6 \text{ dB}$	2 380 2 503,5	-53	CW
$P_{\min} + 6 \text{ dB}$	2 300 2 330 2 360	-47	CW
$P_{\min} + 6 \text{ dB}$	2 523,5 2 553,5 2 583,5 2 613,5 2 643,5 2 673,5	-47	CW
NOTE 1: P_{\min} is the minimum level of wanted signal (in dBm) required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.			

Table 7: Receiver Blocking parameters receiver category 2 equipment

Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 2)	Type of blocking signal
$P_{\min} + 6 \text{ dB}$	2 380 2 503,5	-57	CW
$P_{\min} + 6 \text{ dB}$	2 300 2 583,5	-47	CW
NOTE 1: P_{\min} is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.			

Table 8: Receiver Blocking parameters receiver category 3 equipment


Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 2)	Type of blocking signal
$P_{\min} + 12 \text{ dB}$	2 380 2 503,5	-57	CW
$P_{\min} + 12 \text{ dB}$	2 300 2 583,5	-47	CW

NOTE 1: P_{\min} is the minimum level of the wanted signal (in dBm) required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 2: The levels specified are levels in front of the UUT antenna. In case of conducted measurements, the levels have to be corrected by the actual antenna assembly gain.

13.2. Test Setup

Conducted measurements

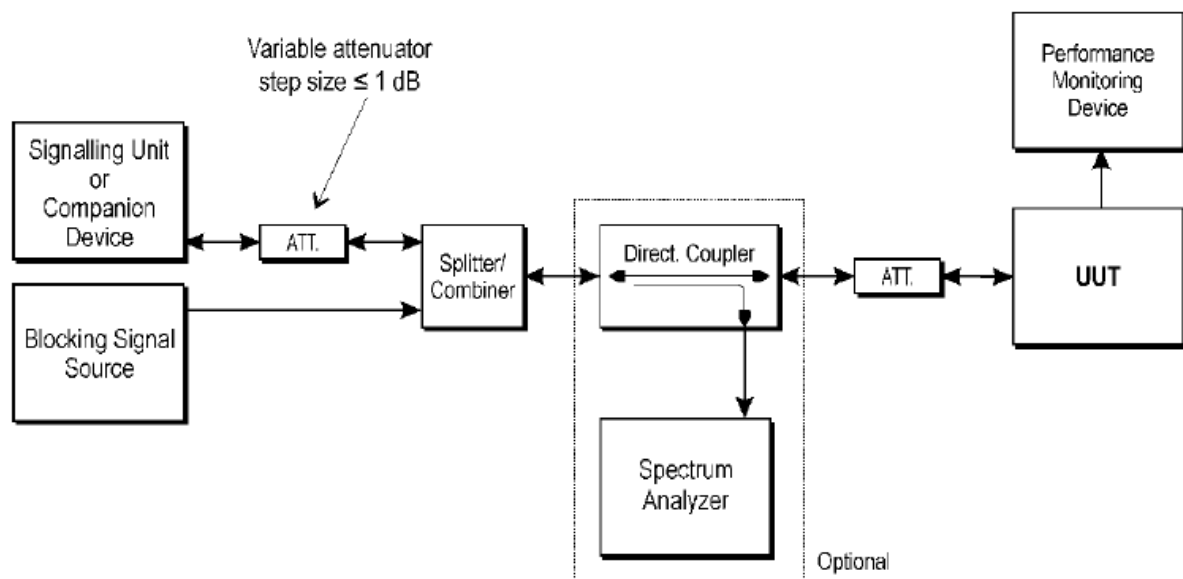

13.3. Test Procedure

Step 1:

- For non-frequency hopping equipment, the UUT shall be set to the lowest operating channel.

Step 2:

- The blocking signal generator is set to the first frequency as defined in the appropriate table corresponding to the receiver category and type of equipment.

Step 3:

- With the blocking signal generator switched off, a communication link is established between the UUT and the associated companion device using the test setup shown in figure 6. The attenuation of the variable attenuator shall be increased in 1 dB steps to a value at which the minimum performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is still met. The resulting level for the wanted signal at the input of the UUT is P_{\min} .

- This signal level (Pmin) is increased by the value provided in the table corresponding to the receiver category and type of equipment.

Step 4:

- The blocking signal at the UUT is set to the level provided in the table corresponding to the receiver category and type of equipment. It shall be verified and recorded in the test report that the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is met.

Step 5:

- Repeat step 4 for each remaining combination of frequency and level for the blocking signal as provided in the table corresponding to the receiver category and type of equipment.

Step 6:

- For non-frequency hopping equipment, repeat step 2 to step 5 with the UUT operating at the highest operating channel.

13.4. Test Result

Please refer to the Appendix for Bluetooth(BT LE) RF Test Data.

14. PHOTOGRAPHS OF TEST SETUP



Spurious Emission below 1GHz



Spurious Emission above 1GHz

-----THE END OF REPORT-----

Bluetooth LE RF Test Data Appendix

Product Name: Personal Mobile Alarm System

Test Model: EV-07B-4G

Environmental Conditions

Temperature:	24.8 ° C
Relative Humidity:	52.9%
ATM Pressure:	100.0 kPa
Test Engineer:	Diamond.Lu
Supervised by:	Tom.Liu


5.4.2 RF Output Power

Condition	Mode	Frequency (MHz)	Max Burst RMS Power (dBm)	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	1.68	1.67	20	Pass
NVNT	BLE	2440	2.41	2.4	20	Pass
NVNT	BLE	2480	2.24	2.23	20	Pass


5.4.3 Power Spectral Density

Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	1.68	10	Pass
NVNT	BLE	2440	2.61	10	Pass
NVNT	BLE	2480	2.14	10	Pass


PSD NVNT BLE 2402MHz

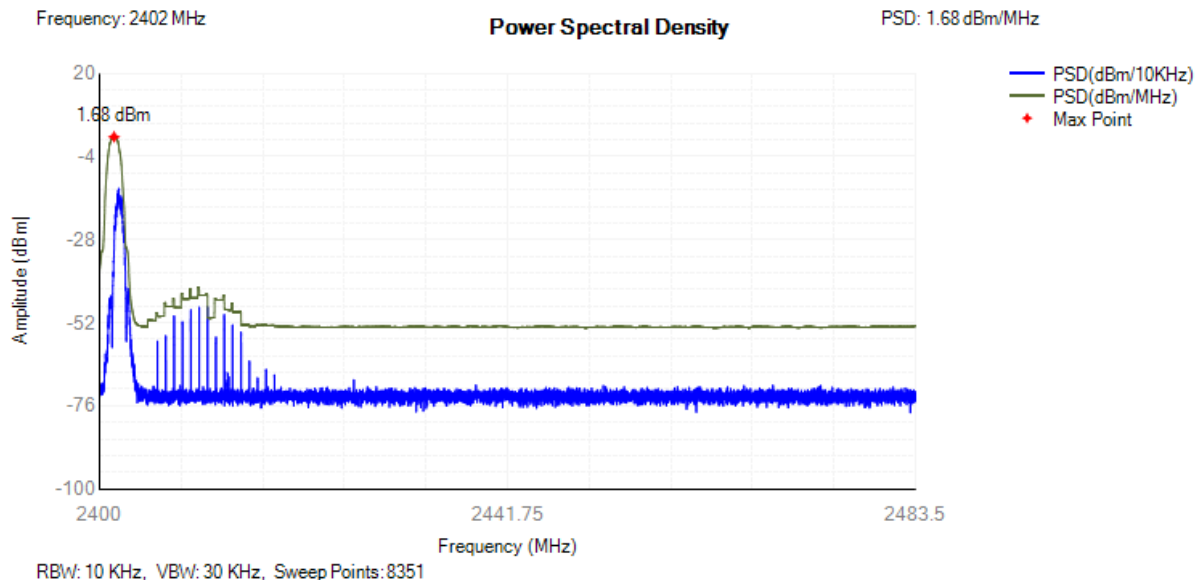

PSD NVNT BLE 2440MHz

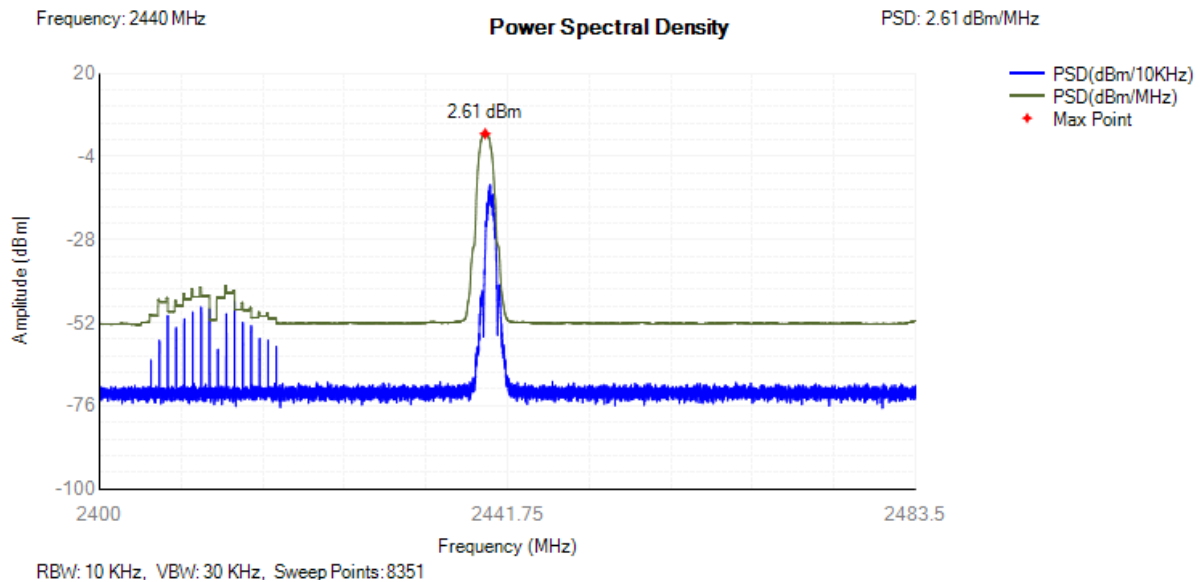


PSD NVNT BLE 2480MHz

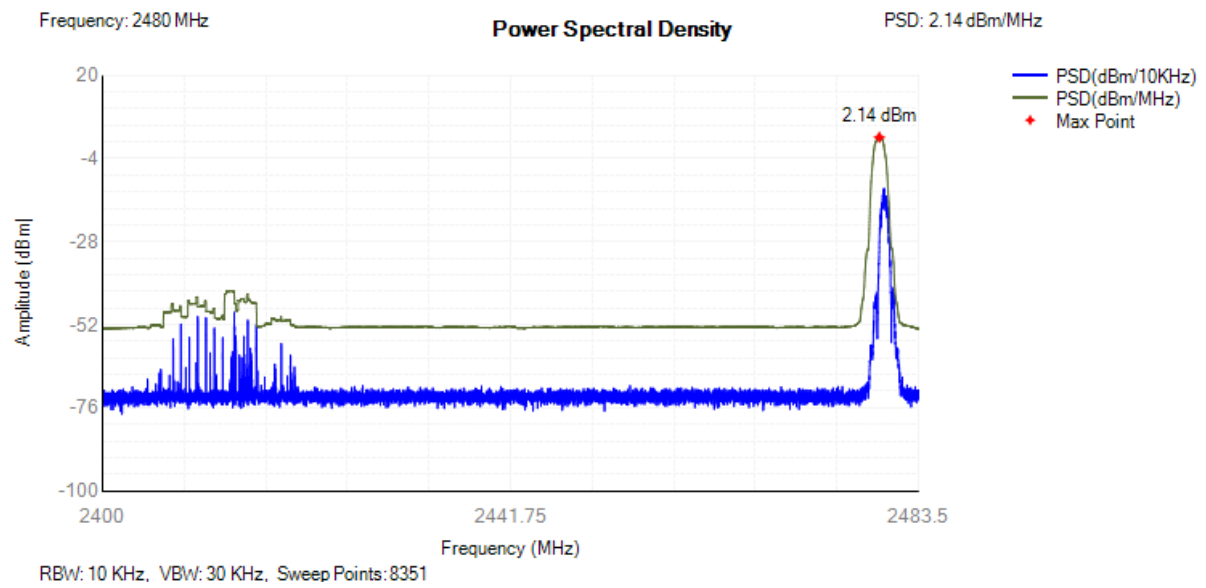


5.4.7 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	BLE	2402	2402.01	1.037	2401.491	2402.528	2400 - 2483.5MHz	Pass
NVNT	BLE	2440	2440.011	1.033	2439.494	2440.528	2400 - 2483.5MHz	Pass
NVNT	BLE	2480	2480.01	1.030	2479.495	2480.526	2400 - 2483.5MHz	Pass


OBW NVNT BLE 2402MHz

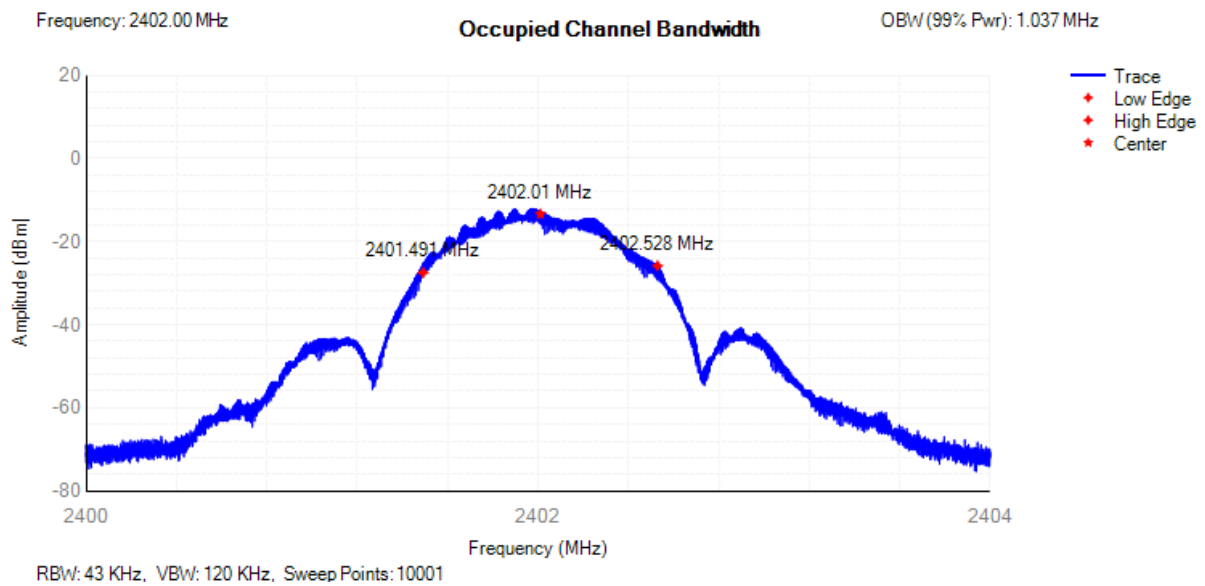

OBW NVNT BLE 2440MHz

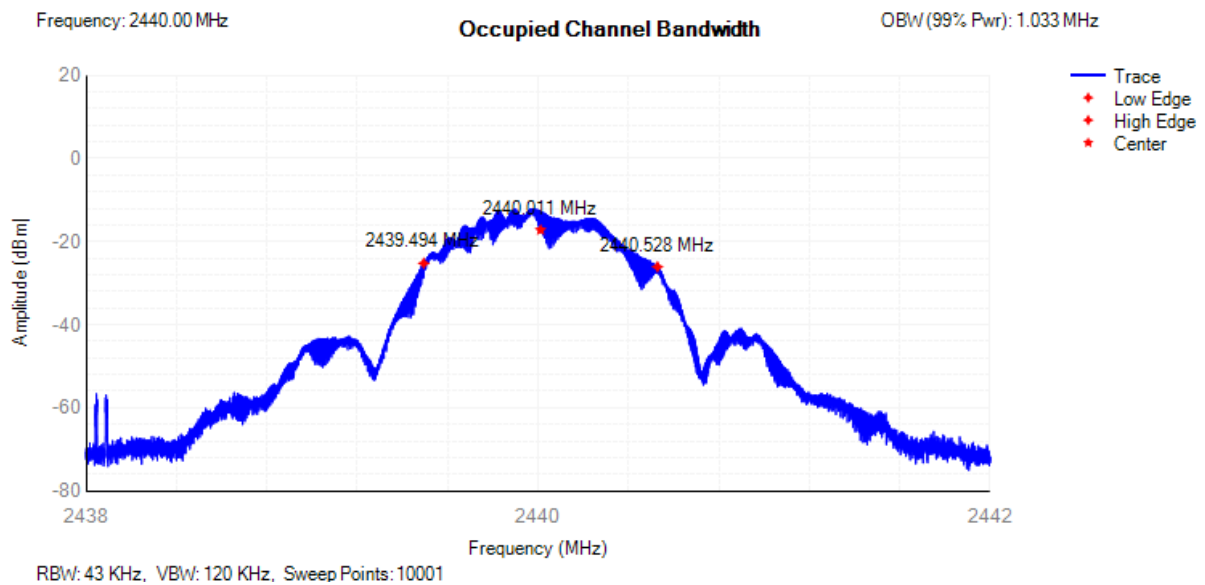


OBW NVNT BLE 2480MHz

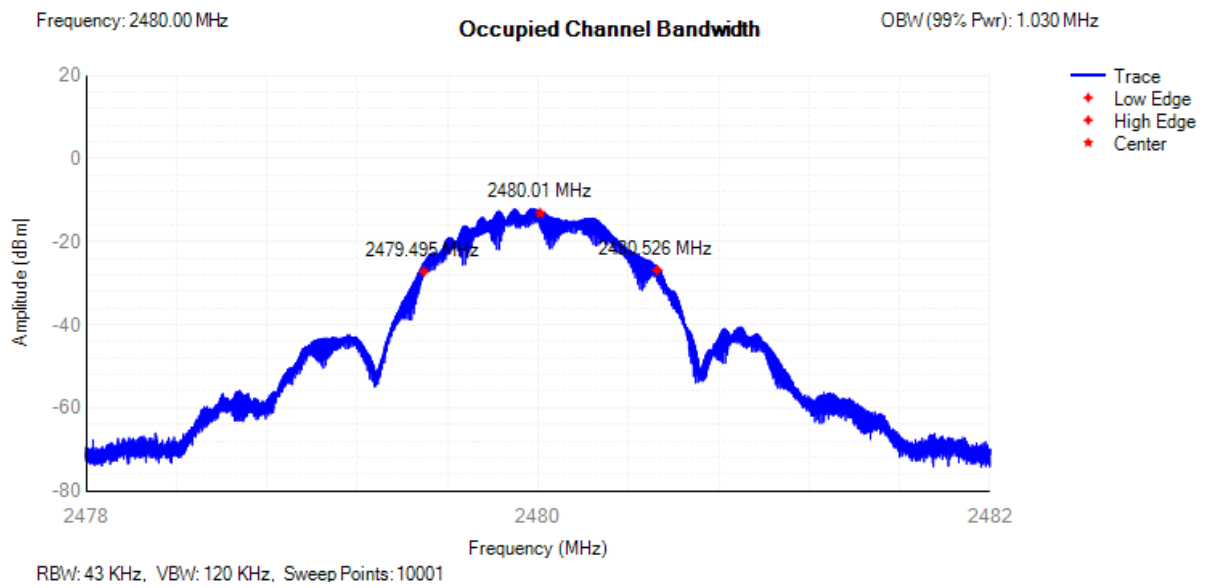


5.4.8 Transmitter unwanted emissions in the out-of-band domain

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	BLE	2402	2399.5	-60.36	-10	Pass
NVNT	BLE	2402	2399.463	-64.02	-10	Pass
NVNT	BLE	2402	2398.463	-69.38	-20	Pass
NVNT	BLE	2402	2398.426	-69.75	-20	Pass
NVNT	BLE	2480	2484	-71.33	-10	Pass
NVNT	BLE	2480	2484.03	-70.3	-10	Pass
NVNT	BLE	2480	2485.03	-71.36	-20	Pass
NVNT	BLE	2480	2485.06	-71.43	-20	Pass

Tx. Emissions OOB NVNT BLE 2402MHz

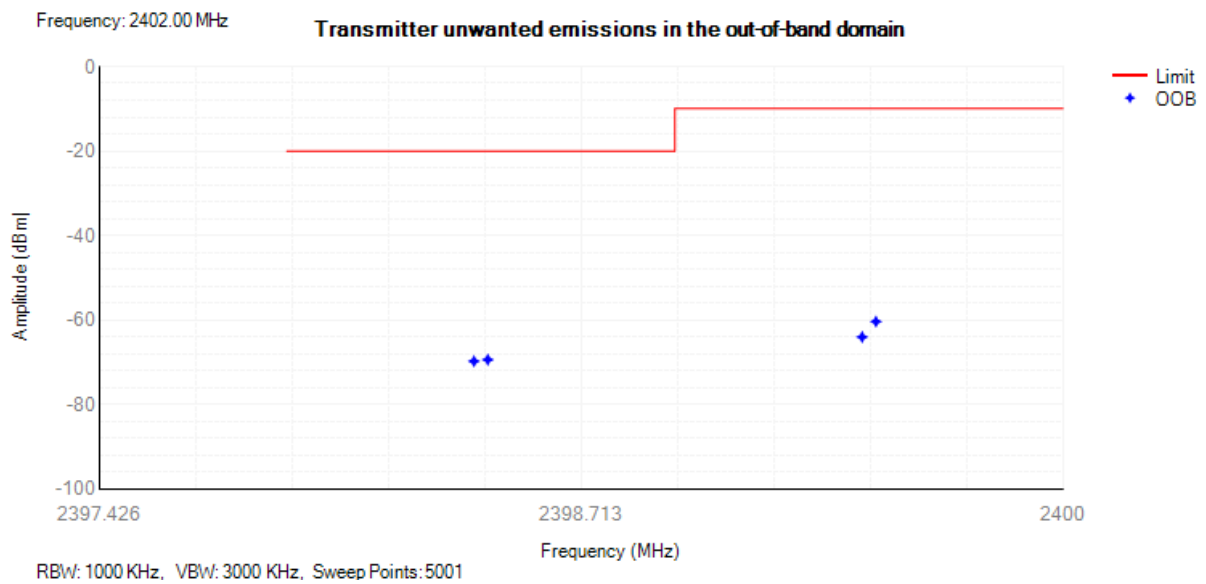


Tx. Emissions OOB NVNT BLE 2480MHz

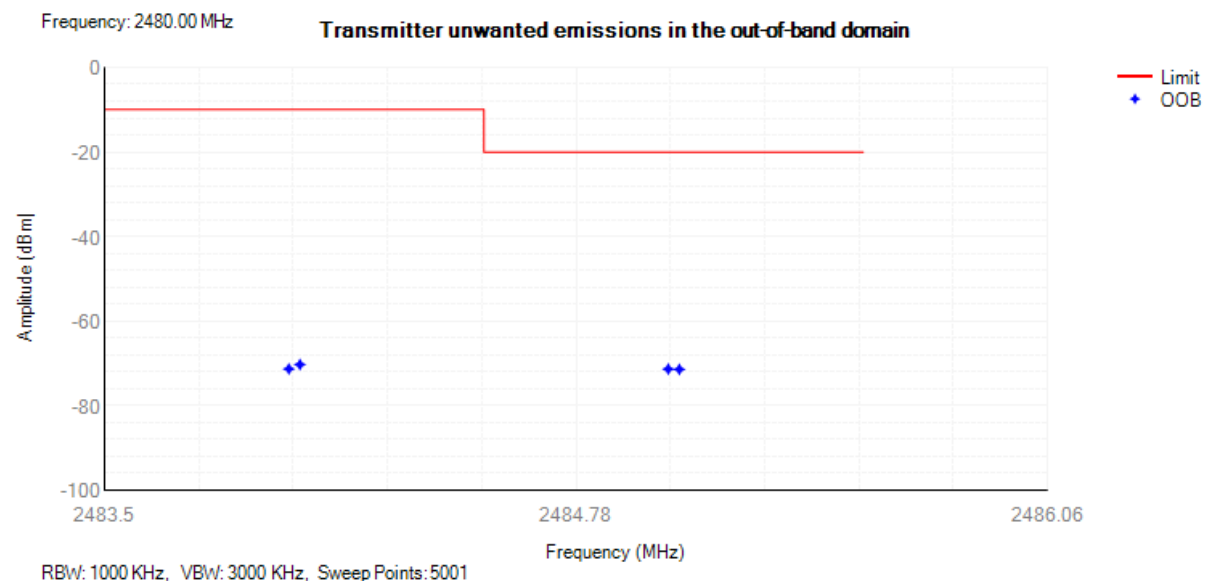


5.4.9 Transmitter unwanted emissions in the spurious domain

Conducted Measurement


Tx. Spurious NVNT BLE 2402MHz

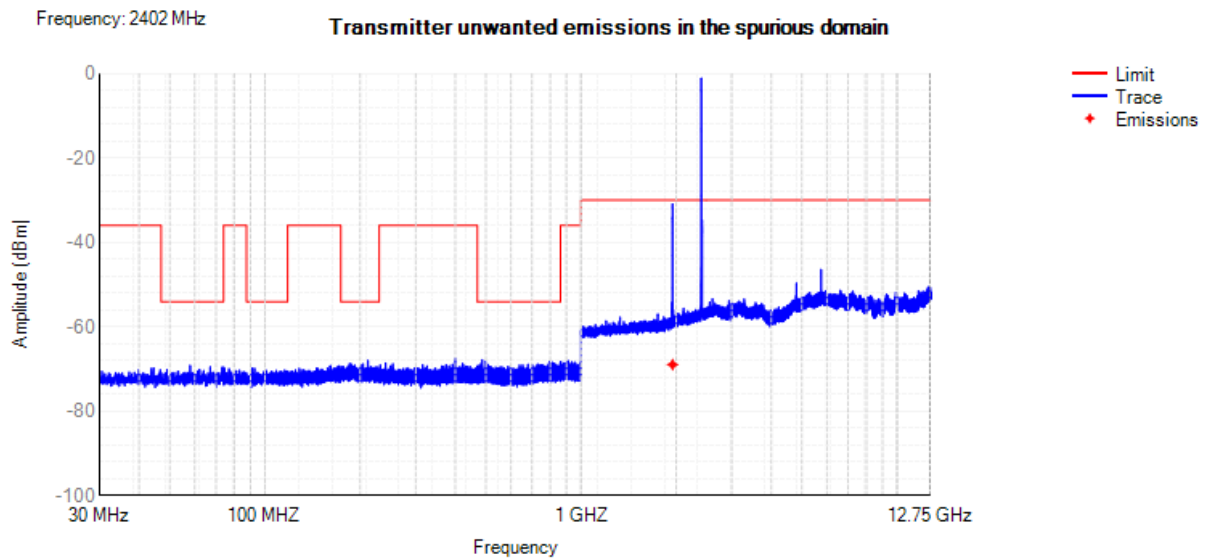

Tx. Spurious NVNT BLE 2440MHz

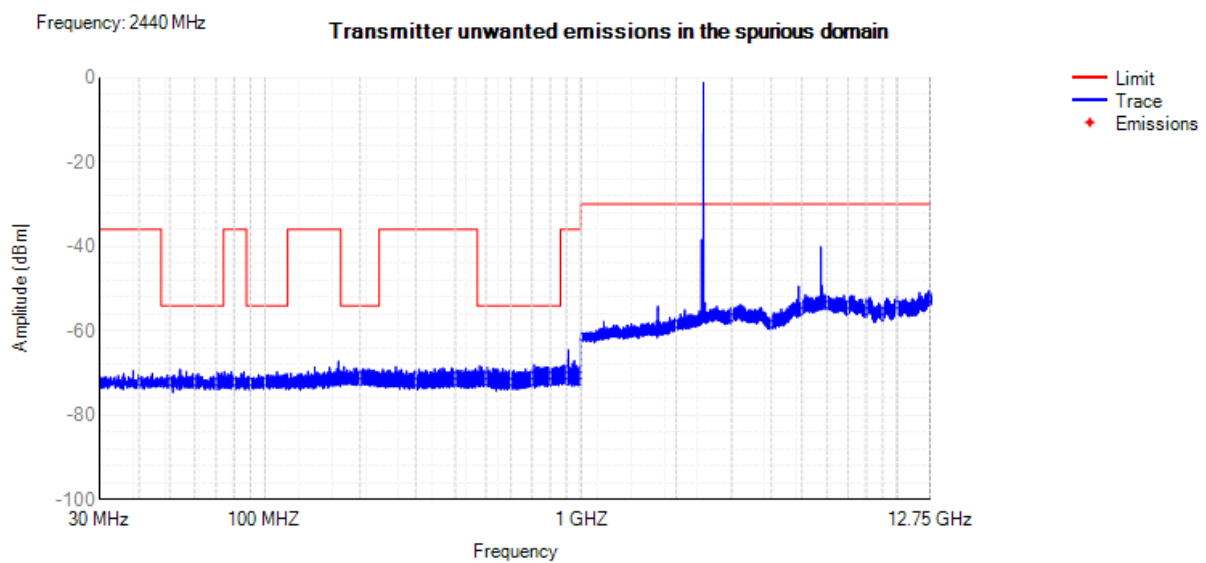

Tx. Spurious NVNT BLE 2480MHz

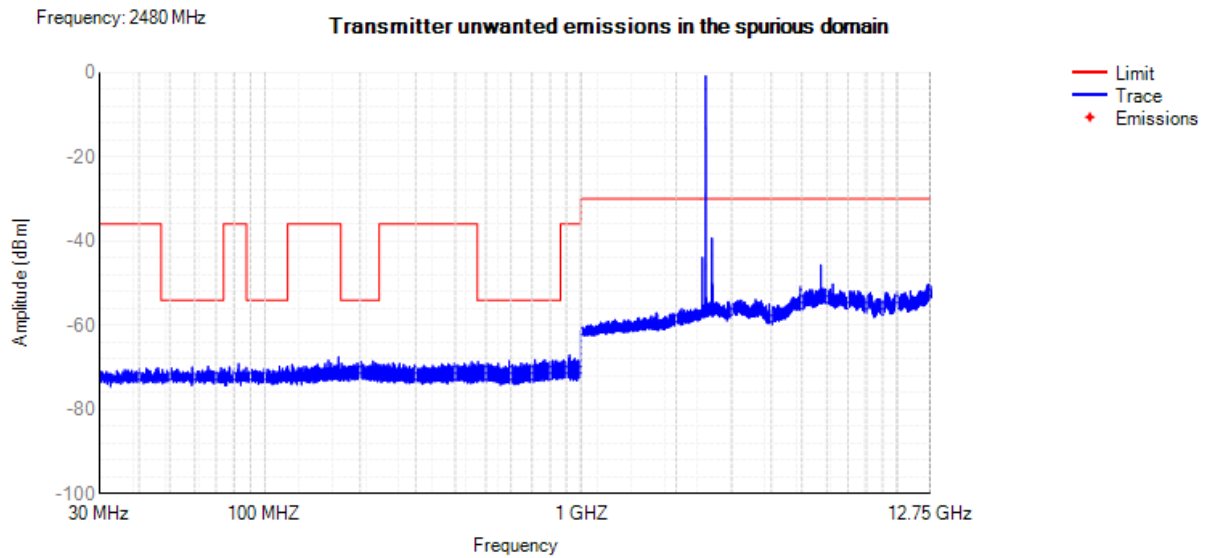

Tx. Spurious NVNT BLE


Radiated Measurement

Frequency (MHz)	Polarization (H/V)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector
Channel 0 (2402MHz)					
169.99	H	-47.77	-36.00	-11.77	PK
261.36	V	-47.90	-36.00	-11.90	PK
972.25	H	-49.06	-36.00	-13.06	PK
872.58	V	-46.10	-36.00	-10.10	PK
4804.03	H	-44.39	-30.00	-14.39	PK
4803.97	V	-41.83	-30.00	-11.83	PK
7205.98	H	-44.94	-30.00	-14.94	PK
7206.02	V	-44.16	-30.00	-14.16	PK
Channel 39 (2480MHz)					
119.68	H	-49.97	-36.00	-13.97	PK
279.17	V	-46.79	-36.00	-10.79	PK
817.23	H	-66.24	-54.00	-12.24	PK
931.20	V	-50.33	-36.00	-14.33	PK
4959.99	H	-41.99	-30.00	-11.99	PK
4960.01	V	-43.92	-30.00	-13.92	PK
7440.02	H	-40.23	-30.00	-10.23	PK
7440.00	V	-44.16	-30.00	-14.16	PK


5.4.10 Receiver spurious emissions

Conducted Measurement


Rx. Spurious NVNT BLE 2402MHz

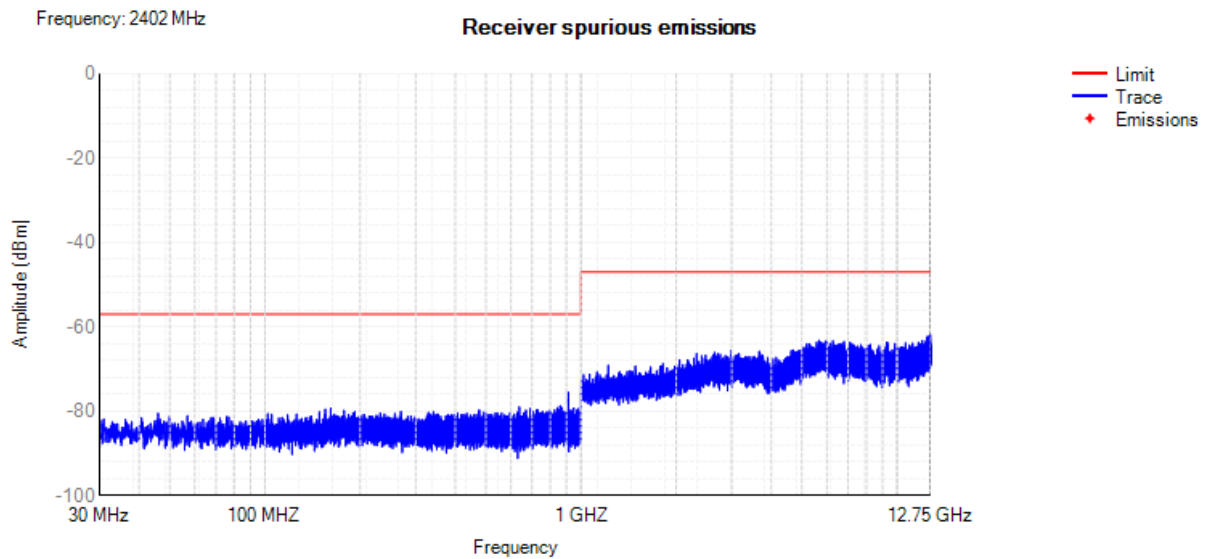

Rx. Spurious NVNT BLE 2440MHz

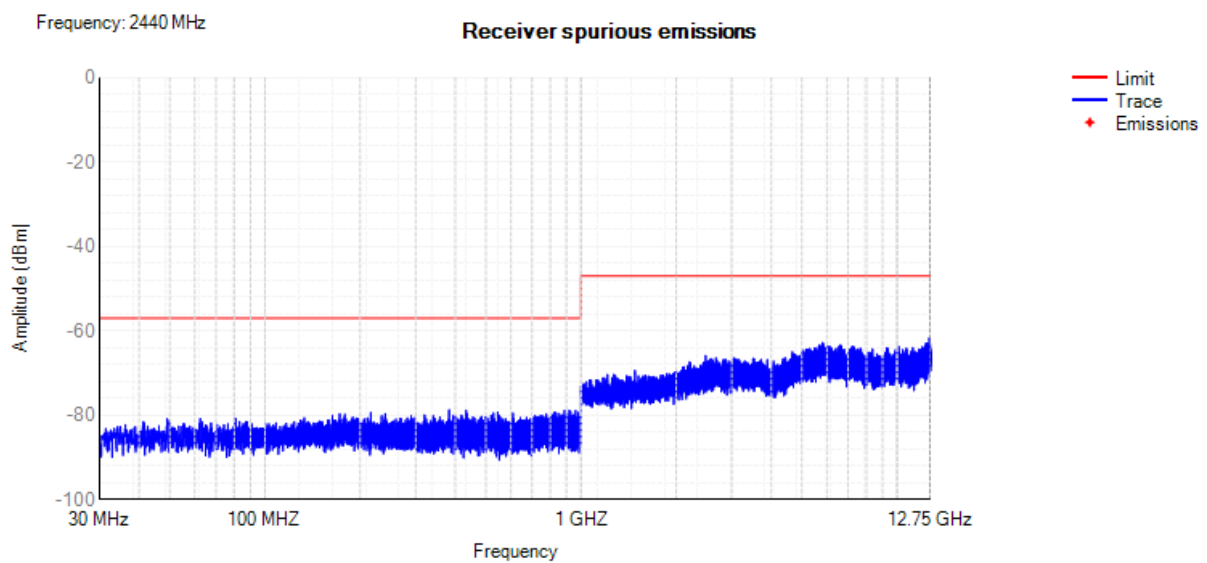

Rx. Spurious NVNT BLE 2480MHz

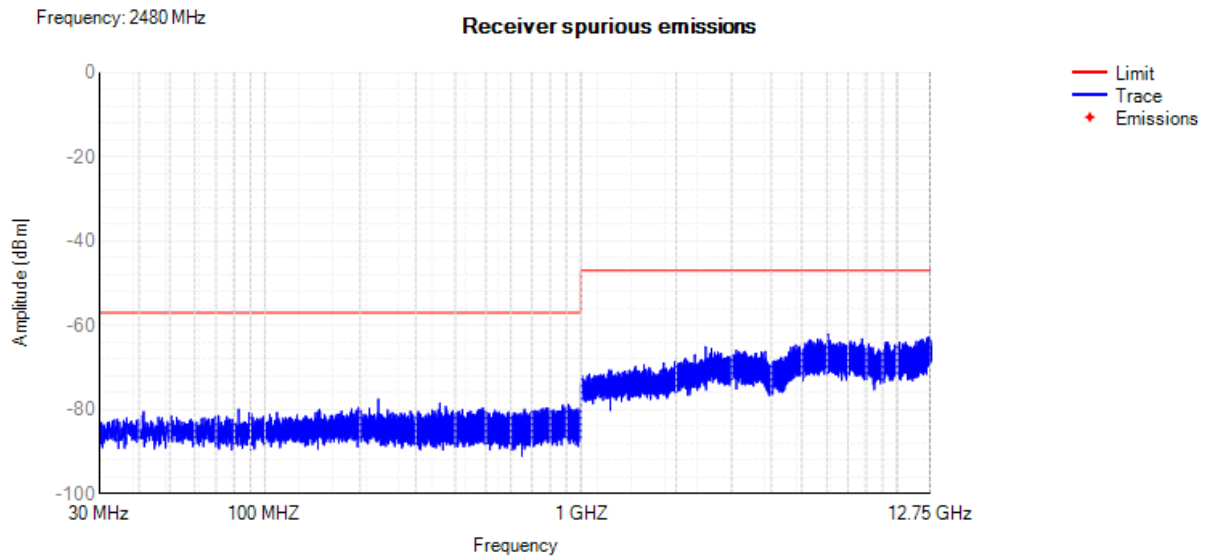

Radiated Measurement

Rx. Spurious NVNT BLE

Frequency (MHz)	Polarization (H/V)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector
Channel 0 (2402MHz)					
266.07	H	-68.65	-57.00	-11.65	PK
129.96	V	-67.54	-57.00	-10.54	PK
964.57	H	-69.62	-57.00	-12.62	PK
838.24	V	-67.23	-57.00	-10.23	PK
1730.35	H	-59.62	-47.00	-12.62	PK
1566.69	V	-61.61	-47.00	-14.61	PK
2263.88	H	-61.66	-47.00	-14.66	PK
2849.09	V	-57.09	-47.00	-10.09	PK
Channel 39 (2480MHz)					
260.81	H	-69.82	-57.00	-12.82	PK
187.50	V	-70.86	-57.00	-13.86	PK
871.61	H	-70.15	-57.00	-13.15	PK
878.93	V	-71.74	-57.00	-14.74	PK
1773.57	H	-57.28	-47.00	-10.28	PK
1589.50	V	-57.17	-47.00	-10.17	PK
2192.83	H	-58.80	-47.00	-11.80	PK
2843.56	V	-58.81	-47.00	-11.81	PK

5.4.11 Receiver Blocking

Wanted Signal Mean Power from Companion Device (dBm)	Test Mode	Test Channel (MHz)	Blocking Signal Frequency (MHz)	Pmin	Blocking Signal Power (dBm)		Type of Blocking Signal	PER(%)		Test Result
					Test Value	Limit		Test Value	Limit	
Pmin + 6 dB	BLE	2402	2380	-86	-33	≥ -57	CW	7.98	10	Pass
			2503.5	-88	-25	≥ -57	CW	7.35	10	Pass
			2300	-89	-26	≥ -47	CW	8.48	10	Pass
			2583.5	-92	-18	≥ -47	CW	8.60	10	Pass
		2480	2380	-90	-29	≥ -57	CW	5.52	10	Pass
			2503.5	-89	-25	≥ -57	CW	6.59	10	Pass
			2300	-89	-22	≥ -47	CW	6.05	10	Pass
			2583.5	-89	-19	≥ -47	CW	5.34	10	Pass